Quality check

3DTransVidia verifies the quality of a 3D model definition according to the international automotive and aerospace standards (MIL STD 31000, VDA 4955, JAMA, and AIAG D-15). The quality criteria can be set by the user to meet internal company standards or reflect the model quality required in a manufacturing or simulation process.

Product Manufacturing Information

The Product Manufacturing Information (PMI) stored with a 3D model is now easily accessible from CATIA V5, UGX and Pro/E native files and STEP 242.

PMI text and dimensions provide essential manufacturing information about tolerances, surface quality, tolerance for parallel walls or axis, etc. PMI information is displayed on the 3D model and accessible from the project tree. You can activate/hide PMI layers, change the font type, alter the letter size, edit dimensions, and print the PMI information for documentation purposes.



Capvidia GmbH
An der Erftmendung 16
41468 Neuss
Germany

Tel: +49 2131 1780145 Fax: +49 2131 1780146 GSM: +49 1522 3690000


Samwell Testing Inc. MR Room 16B10 E Hanwei Plaza, No. 7 Guanghua Road, Chaoyang District, Beijing, 100004, China Tel: +86-10-65610249

Capvidia NA LLC Mobile: 507 276 2379 Phone: 507 794 5447

Capvidia NA LLC Irvine, CA Phone: 949-910-2916 E-mail: sales@capvidia.cc

YM3 Ltd. No.208,27-1 Idasugiyama-cho Nakahara-kuKawasaki-shi, Kanagawa-ken 211-0036 Japan

Mobile +81-(0)90-6549-6609 E-mail saito@ym3.biz





Supported Formats:

- CATIA V4
- CATIA V5 with PMI
- Unigraphics with PMI SIEMENS NX
- Pro/E with PMII
- Pro/E Creo
- Inventor
- · IIIVEIILOI
- SolidWorks
- SolidEdge
- Parasolid
- ACIS
- STEP
- IGES
- IG2
- VDA-FS
- CAPXML
- 3DPDF
- XCGM
- AutoForm (.af, .afm)
- VRML
- STL







3DTransVidia is designed to repair 3D models created in different CAD systems. The repair process is automatic and can be applied to most complex 3D models and assemblies. The repair is always performed within the model tolerance maintaining the original model integrity and preventing model deformations. 3DTransVidia supports both native and neutral data formats.


CAD models often lack quality and precision required by the complex engineering processes (CAD -> CAE -> CAM). The geometrical and topological flaws are main obstacles in data translation. Complex CAD operations such as model rescaling, offsetting or Boolean operations are impossible to perform on invalid models. Repairs in native CAD system are in general difficult and time consuming as they are not designed for this purpose.

3DTransVidia offers the ultimate solution to repair existing 3D CAD models to the desired quality. Geometry check tools verify model compliance against the automotive and aerospace industry standards as MIL STD 31000, VDA 4955-2, JAMA and AIAG D-15 or user defined quality criteria.

The repair process consists of the following steps:

CAD DATA TRANSLATION, REPAIR AND HEALING

- Data import
- Model tolerance control
- Automatic repair & healing
- Frror classification
- Manual repair
- manaat repai
- Quality check
- Data export





Data Import

3DTransVidia solves frustrating data incompatibility problems occurring during the import of 3D models. It seamlessly imports native and neutral data formats and performs necessary model repairs to form a valid solid.

Model Tolerance

3DTransVidia automatically finds the right model tolerance value by verifying the size of all model entities. The user controls the model tolerance by choosing between the following options:

- File tolerance (value stored in the file)
- Estimated tolerance (recommended default value)
- User tolerance

Automatic Repair


The automatic repair resolves over 60 typical geometry and topology conflicts. The repair is performed within a specified model tolerance without changing or deforming the original model. Even an inexperienced CAD user will complete the repair within a very short time.

Geometry Conflicts

- Invalid curve parameterization
- Gaps in composite curve
- Degenerative segments in polyline
- NURBS improving simplification of curve
- Incorrect knots vector in the NURBS curve
- And more...

Topology Conflicts

- Invalid edge vertices
- Invalid loop orientation in Parametric Space
- Missing loop definition in Model Space
- Missing loop definition in Parametric Space
- Invalid edge orientation
- Lack of loop synchronization
- Not closed loop
- Self-crossing loop
- Missing outer loop in face definition
- Wrong index of outer loop Invalid loop orientation
- Inconsistent face normal
- And more ...

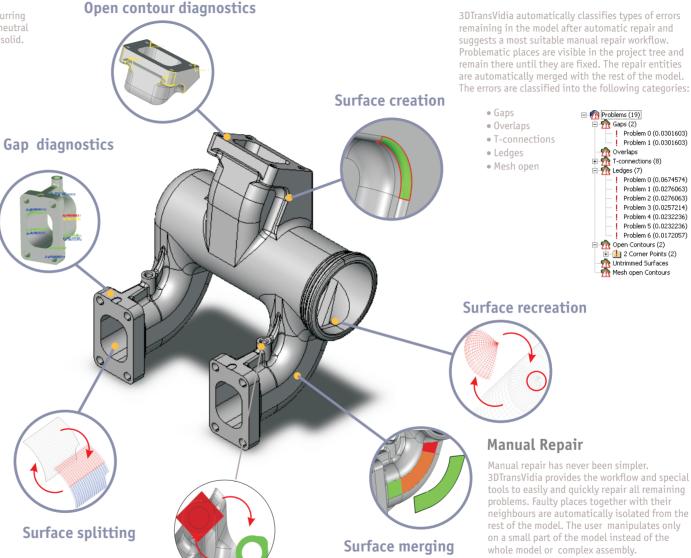

Surface trimming

Error Classification

□ M Problems (19)

- 🙌 Gaps (2)

N Overlans

Ledaes (7)

T-connections (8)

Open Contours (2)

🗓 📵 2 Corner Points (2) M Untrimmed Surfaces

Mesh open Contours

3DTRANSVIDIA

CAD DATA TRANSLATION, REPAIR AND HEALING

Problem 0 (0.0301603)

Problem 1 (0.0301603)

Problem 0 (0.0674574)

Problem 1 (0.0276063) Problem 2 (0.0276063) Problem 3 (0.0257214)

Problem 4 (0.0232236) Problem 5 (0.0232236) Problem 6 (0.0172057)